

DPE Series RF coaxial connectors

- MIL-C-39012


Bayonet RF coaxial connectors compliant with MIL-C-39012

- Quick connection and high reliability
- Widely applied in wireless devices and instruments

Main technical characteristics

Temperature Range	-55~+165℃	Insulation resistance	≥5000MΩ
Characteristic Impedance	50Ω、75Ω	Dielectric Strength	1500V (rms)
Frequency Range	0~4GHz	Voltage standing wave ratio (VSWR)	≤1.30
Operating Voltage	500V (rms)	Separating force	≥0.6N
Contact resistance	Central conductor	≤0.002Ω	Endurance 500 500 cycles
	Outer conductor	≤0.0002Ω	

Interface Dimensions

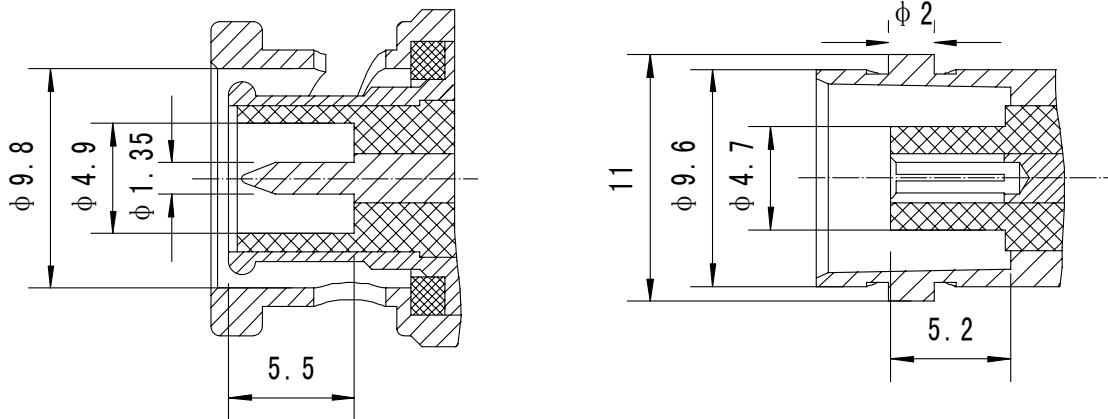

Name	Material & Plating	Name	Material & Plating
Outer conductor	Brass with nickel plating	Sealing member	Silicone Rubber

