




























## ZE-FJJP cable accessory

Assembly drawing:

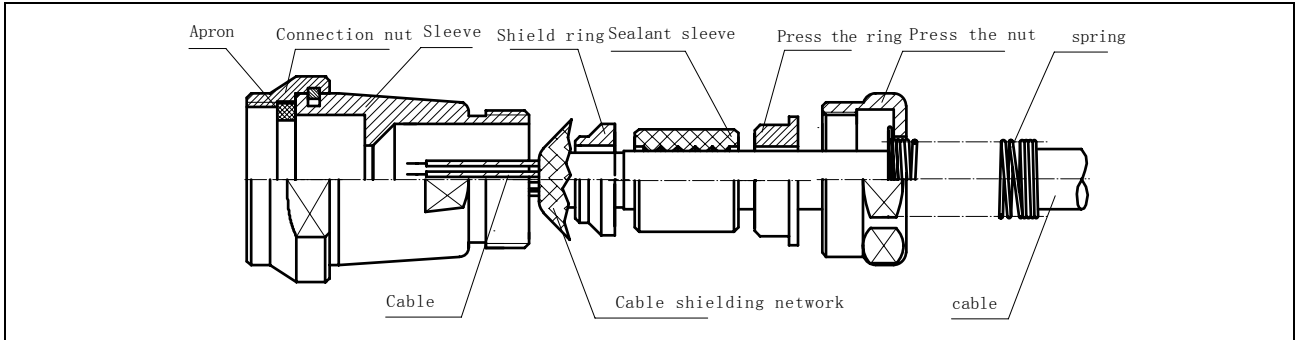

### Usage method:

1. The cable is thought the spring, the locking nut, the locking ring, the sealing rubber sleeve and the shielding ring. The braid is turned over the shielding ring.
2. The contact of plug is terminated with the wire.
3. Tighten the coupling nut and the rear thread of the plug, sealing them with one rubber ring.
4. Screw the locking nut, wrap the sealing rubber sleeve on the cable by pressing the sealing rubber and clamp the cable to seal the accessory and the cable. Keep close to the braid, braid and sleeve to realize the continuity between the braid and shell
5. Install the spring on the connection between the cable and accessory to prevent cable from damaging due to bend.

<p>* Cable diameter: <math>\Phi(D-2) \sim \Phi D</math></p>	Shell size	A	B	L	D
	14	14	20	42	7.5
	18	18	26	42	7.5, 10, 14
	22	22	30	44	7.5, 10, 14, 16, 18
	24	24	32	44	10, 12, 16, 18, 20
	27	27	36.5	44	14, 18, 20
	30	30	39.5	44	12, 20, 22
	33	33	43	44	12, 22
	36	36	44	49	18
	39	39	48	51	22

## ZE-FJJP01 cable accessory

<p>* Cable diameter: <math>\Phi(D-2) \sim \Phi D</math></p>	Shell size	A	B	D
	14	14	20	10, 12, 14, 16
	18	18	26	10, 12, 14, 16
	22	22	30	12, 14, 16, 18, 20
	24	24	32	12, 14, 16, 18, 20
	27	27	36.5	14, 16, 18, 20
	30	30	39.5	7.5, 12, 14, 18, 20
	33	33	43	20, 22, 24
	36	36	44	24
	39	39	48	18