

RCA connector



Electric Data		
Characteristic Impedance	75ohm	
Frequency Range	0-1GHz	
Working Voltage	500 VRMS(max at sea level)	
Contact Resistance	Inner: 3 milliohms(max) Outer: 2 milliohms(max)	
Insulation Resistance	1000 megohms(min)	
Mechanical Data		
Durability Mating	1000 Cycles min.	
Material Data		
Connector Parts	Materials	Plating Finish
Body	Brass	Gold or Nickel
Male Pin	Brass	Gold or Nickel
Insulators	PTFE	N/A
Environmental Data		
Temperature Range	-30～+80℃	

Note: We can provide other materials and plating specifications according to customers ' requirements





APMA

Part Number	Description
-------------	-------------

RCA-PP


RCA Male To Male Adaptor

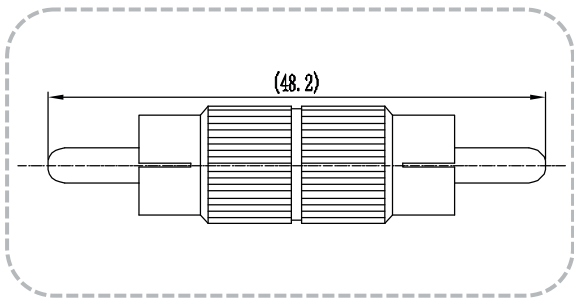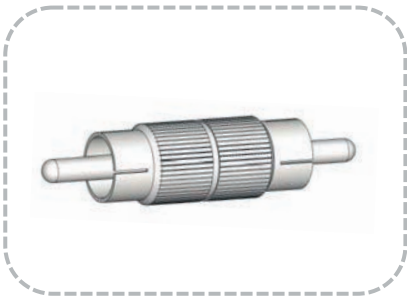

Part Number	Description
-------------	-------------

RCA-JJ


RCA Female To Female Adaptor

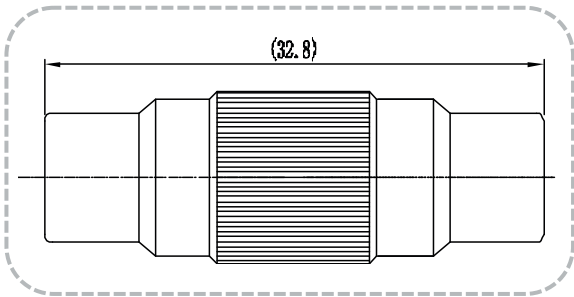

Part Number	Description
-------------	-------------

RCA-JJK


RCA Female To Female Bulkhead Adaptor


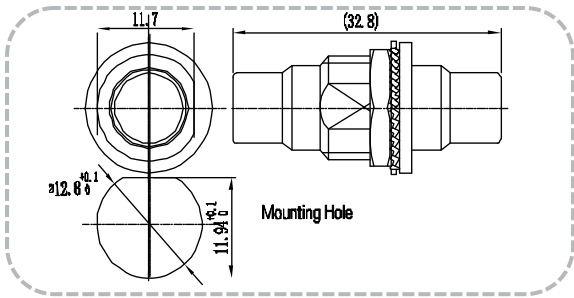


Part Number	Description
-------------	-------------

RCA-JP

RCA Female To Male Adaptor

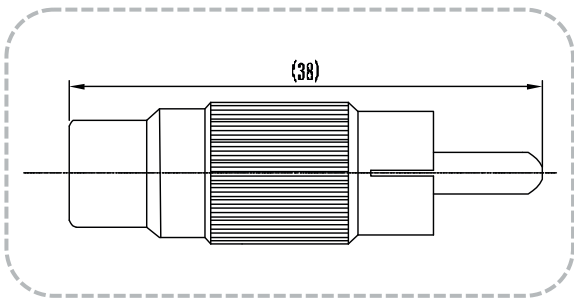

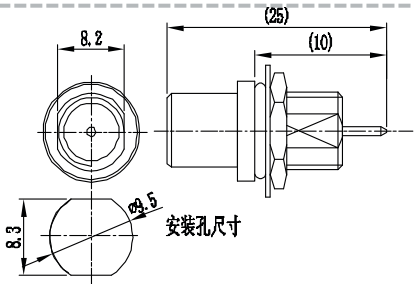Part Number	Description
RCA-JKM	RCA Female Bulkhead Receptacle Solder Pot Terminal
	

Part Number	Description	Cable Category	Notes
RCA-PIL-517	RCA Male Straight Clamp Type	5/75S(SFF-75-3-1,SYV-75-3,3C-2V)	A=5.5
RCA-PIL-617		6/75S(RG-59B/U)	A=6.4
RCA-PIL-727		7/75S(RG-6A/U)	A=7.2
		