



400-1000MHz/25Watt/Module

Model Number: OC-PA04-1K25W

The OC-PA04-1K25W is suitable for multi octave broadband high power RF,UHF linear applications. This compact module utilizes advanced high power devices that provide excellent power density, high efficiency, wide dynamic range and low distortions. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Keylink's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.

FEATURES:

- Small Size and light weight;
- Instantaneous ultra broadband;
- 50 Ohms input and Output matched;
- Built-in control and protection circuits.

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	400		1000	MHz
RF Output Power	P _{out}		25		Watt
Power Gain	G		44		dB
Small Gain Flatness	Δ G		±2		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @15W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{DC}	26	28	30	Volt
DC Current @25W	I _{DD}		6		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	150x90x25 [5.9x3.55x0.98]	mm [inch]	Maximum
Weight	1.2 [2.64]	kg [lbs]	Maximum
RF Connectors Input	SMA Female		
RF Connectors Output	SMA Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+5dBm	Maximum
Load VSWR @ P _{OUT} =15W	∞ @ all load phase & amplitude for duration of 30 minute; 3:1 @ all load phase & amplitude continuous	
Thermal Overload	85°C shutdown	




400-1000MHz/25Watt/Module

Model Number: OC-PA04-1K25W

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
4,5,9	VDD	28V _{DC}
6,7,8	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT MONITOR	Analog voltage relative to I _{DD} @ 100mV per Ampere


OUTLINE DRAWING (All dimensions in mm [inch])

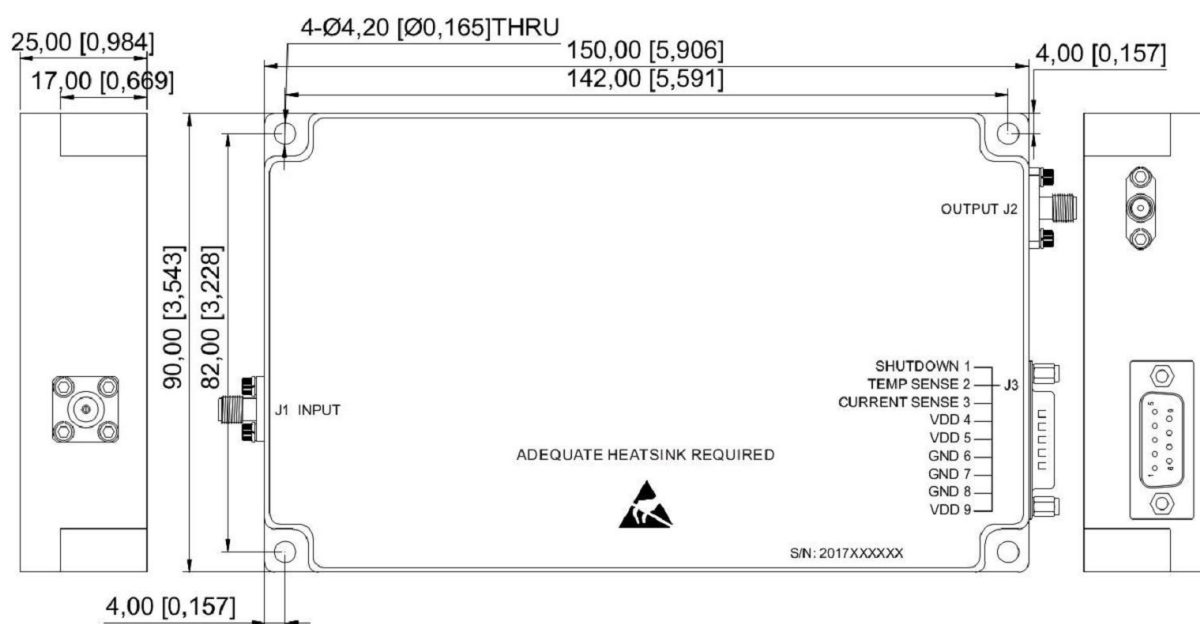

400-1000MHz/25Watt/Module

Model Number: OC-PA04-1K25W

TYPICAL PERFORMANCE PLOTS

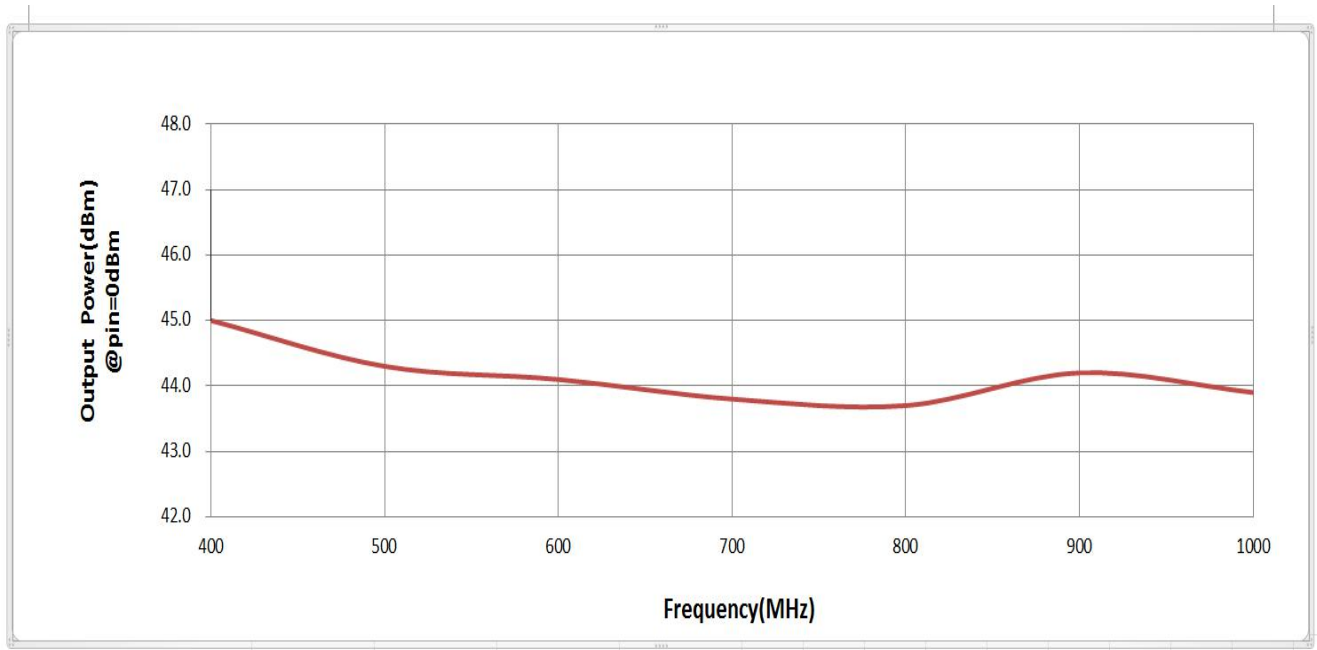

Note: Adequate heatsink required.