

500-2000MHz/3Watt/Module

Model Number: OC-PA05-2K3W

The model OC-PA05-2K3W is a multi-octave high power amplifier operating between 500 MHz and 2000 MHz and offering a wide dynamic Range with 3 Watts typical saturated power. The employment of (GaN) advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency. It is ideal for broadband high power S/C Band applications.

FEATURES:

- Broadband & High power
- High Efficiency
- Great Linearity
- Small Size & Light Weight
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +12.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	500		2000	MHz
RF Output Power	Pout	2	3		Watt
Power Gain	Gp		34		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @10W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switch On/Off@10-90% Time	TON/OFF		1	2	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC		12		Volt
DC Current @2W	IDD		1.8		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	120*80*22[4.7*3.1*0.8]	mm [inch]	Maximum
Weight	1.2[2.64]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ Pout =2W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]


500-2000MHz/3Watt/Module

Model Number: OC-PA05-2K3W

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	VDD	12Vdc
2	VDD	12Vdc
3	VDD	12Vdc
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
8	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
9	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)

OUTLINE DRAWING (All dimensions in mm)

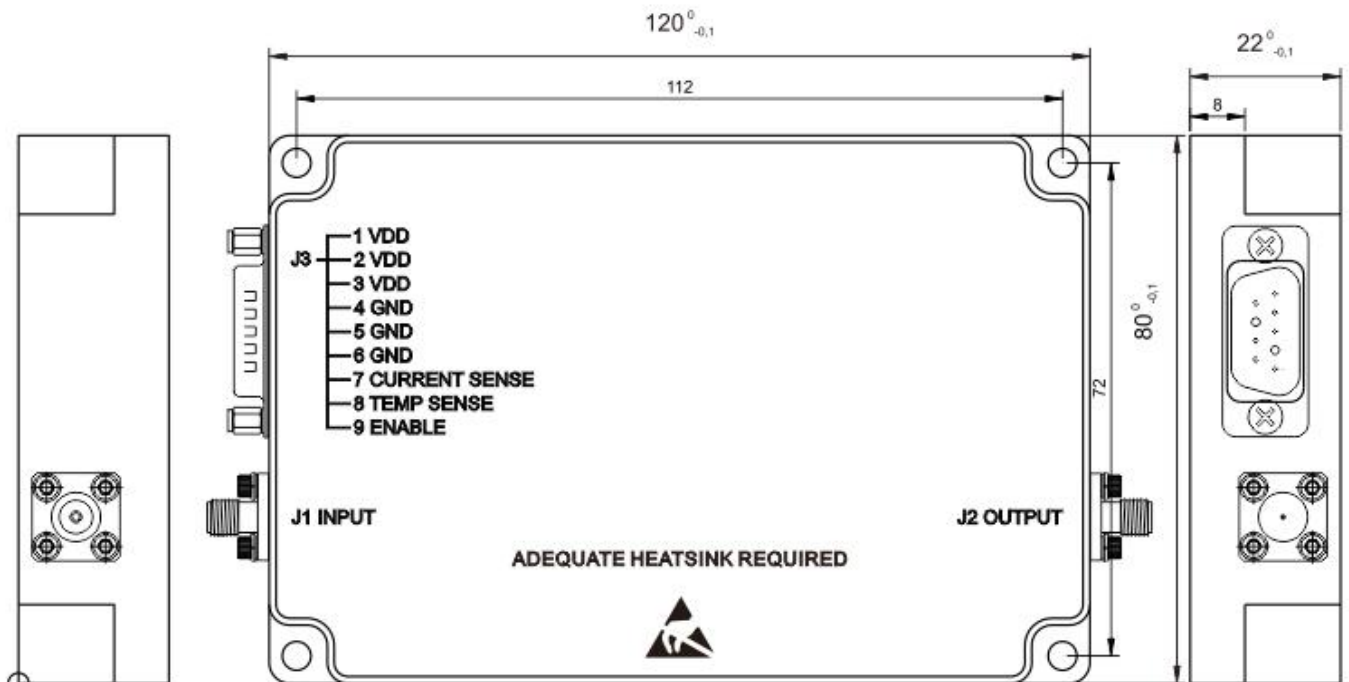


500-2000MHz/3Watt/Module


Model Number: OC-PA05-2K3W

TYPICAL PERFORMANCE PLOTS (For reference only)

Graph1: Output Power (Low temp. $-20\pm 3^{\circ}\text{C}$)

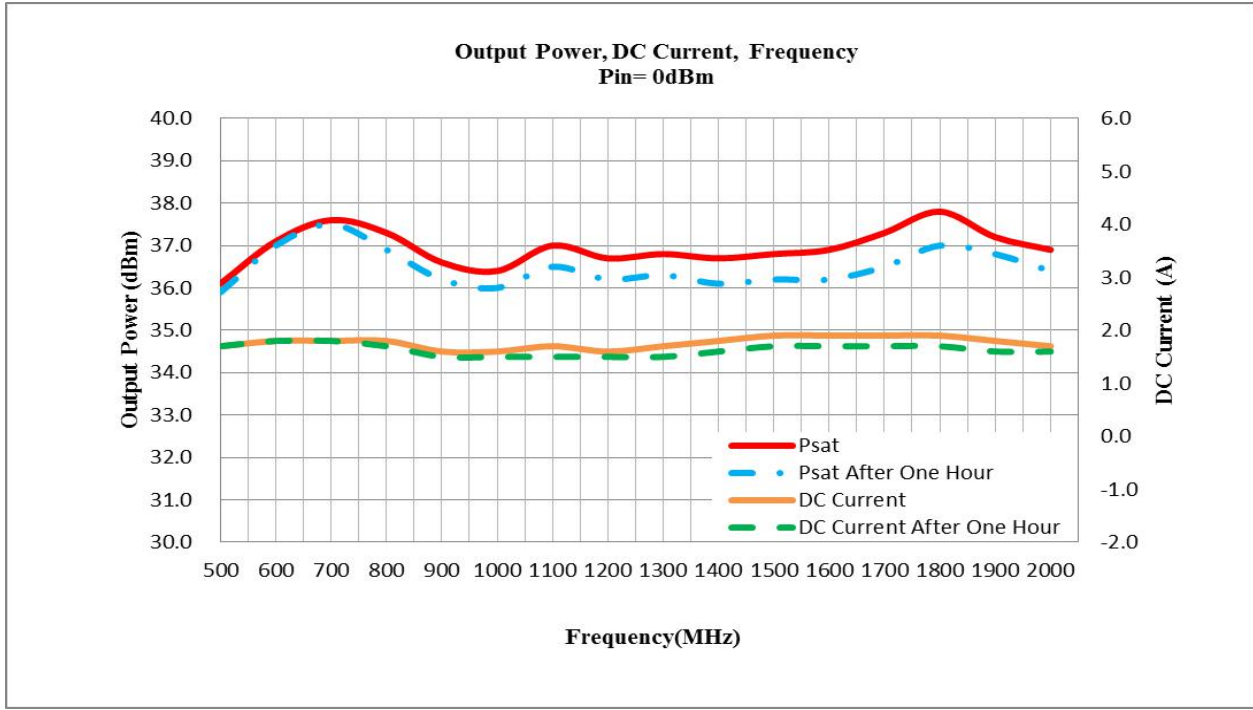


Graph2: Output Power (High temp. $+60\pm 3^{\circ}\text{C}$)

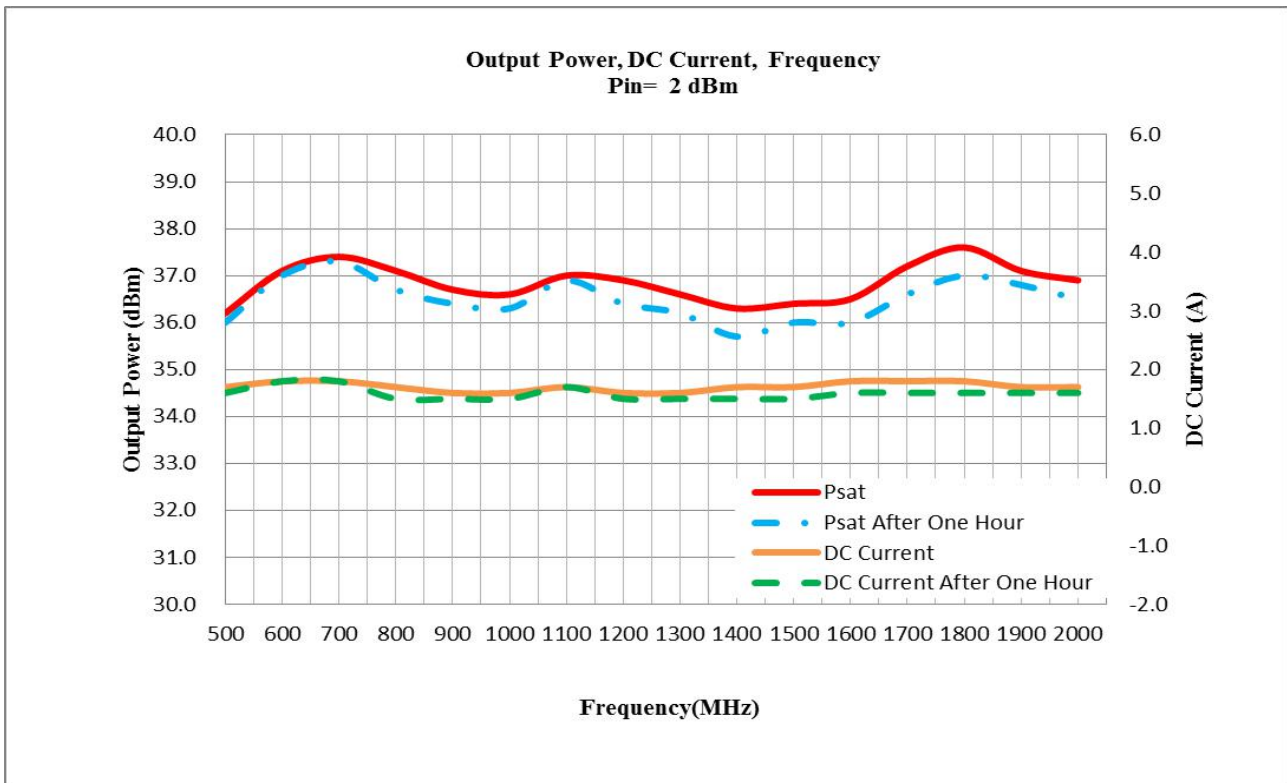


500-2000MHz/3Watt/Module

Model Number: OC-PA05-2K3W

Graph3: Output Power (Normal temp. +25±3 °C)

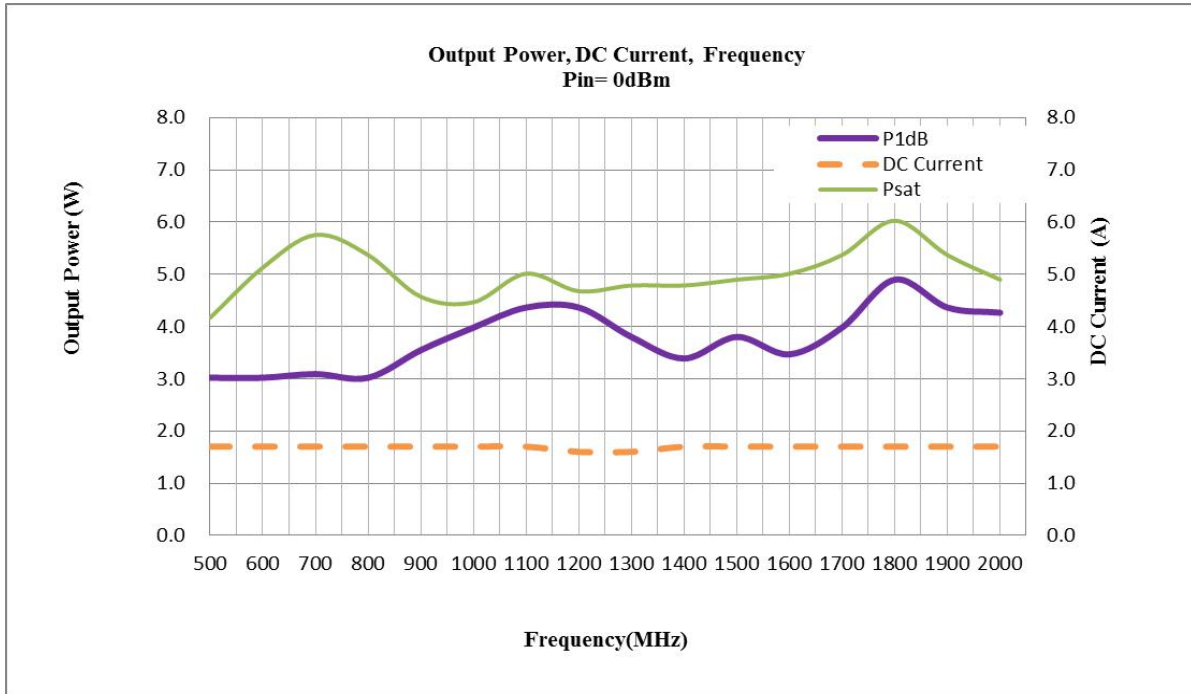


Power Gain:

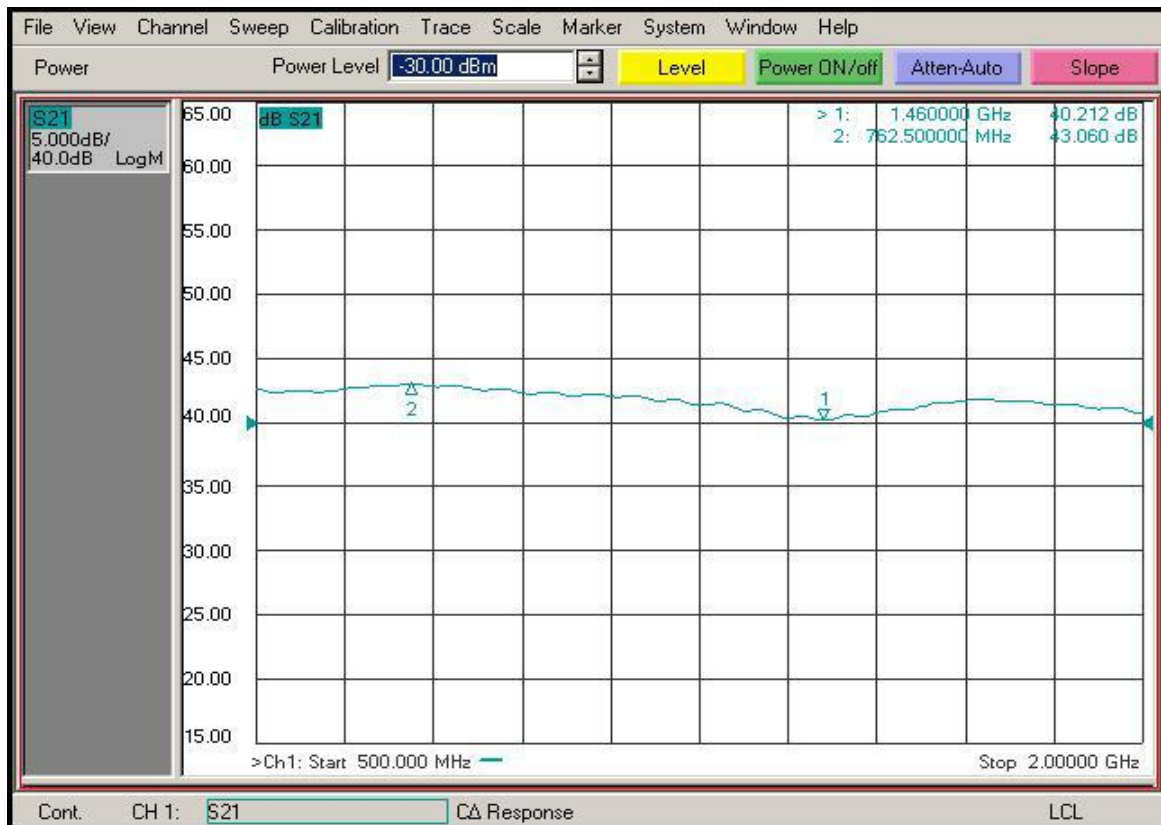

500-2000MHz/3Watt/Module

Model Number: OC-PA05-2K3W

Input Return Loss:

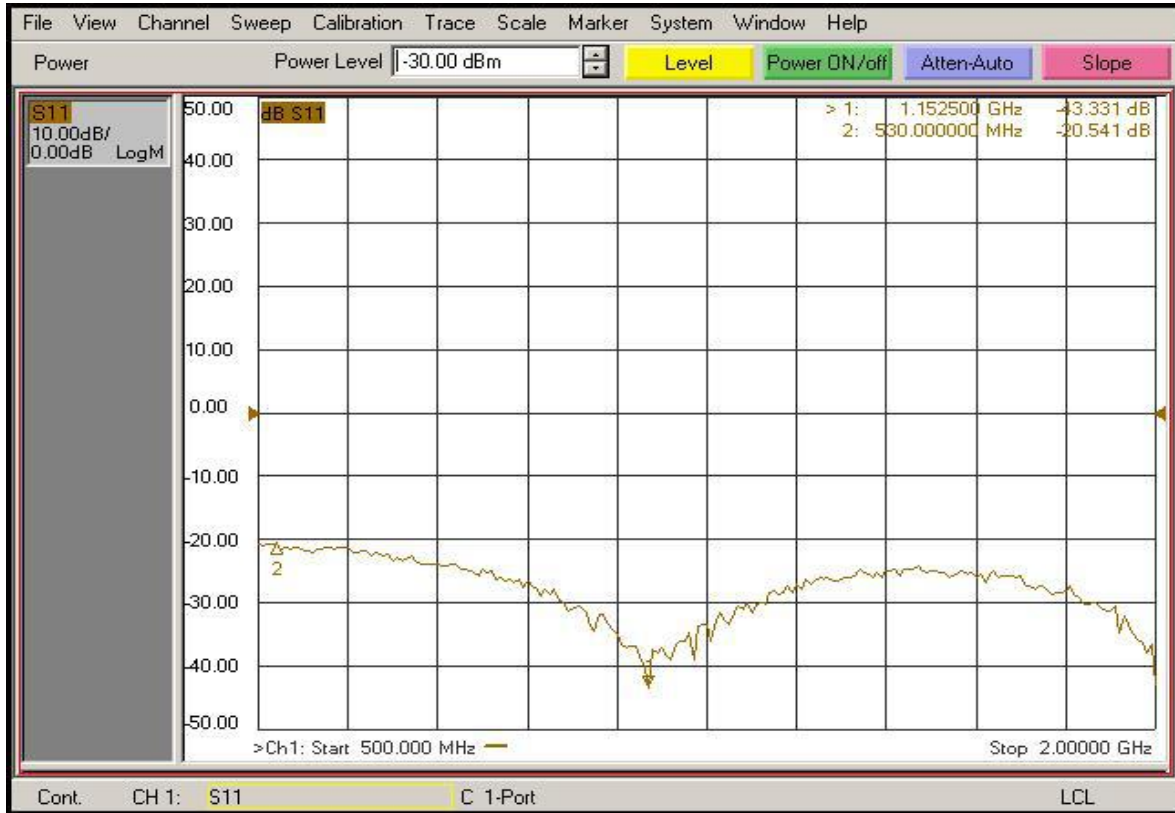

Note: Adequate heatsink required.