



2000-18000MHz/5Watt/Module

Model Number: OC-PA2-18K5W

The model KB20180M37A is a multi-octave high power amplifier operating between 2 GHz and 18 GHz and offering a wide dynamic Range with 5 Watts typical saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency. It is ideal for multi octave broadband high power RF, C&Ku linear applications.

FEATURES:

- Broadband & High power;
- High Efficiency;
- Great Linearity;
- Small Size & Light Weight;
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +22.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2		18	GHz
RF Output Saturated Power	P _{sat}		5		Watt
Power Gain @P _{sat}	G _p		37		dB
Power Gain Flatness	Δ G _{ss}		±3.5		dB
Input Return Loss	S ₁₁			-10	dB
2nd Harmonics @2 W	H		-12		dBc
Spurious	Spur		-55		dBc
Switch On/Off@10-90% Time	TON/OFF		10		μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	20	22	24	Volt
DC Current @5W	IDD		2.5		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	120*80*22[4.7*3.1*0.8]	mm[inch]	Maximum
Weight	1.2[2.64]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ P _{OUT} = 2 W	10:1 @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]




2000-18000MHz/5Watt/Module

Model Number: OC-PA2-18K5W

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1,2,3	VDD	22V _{DC}
4,5,6	GND	Ground
7	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
8	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
9	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)

OUTLINE DRAWING (All dimensions in mm [inch])


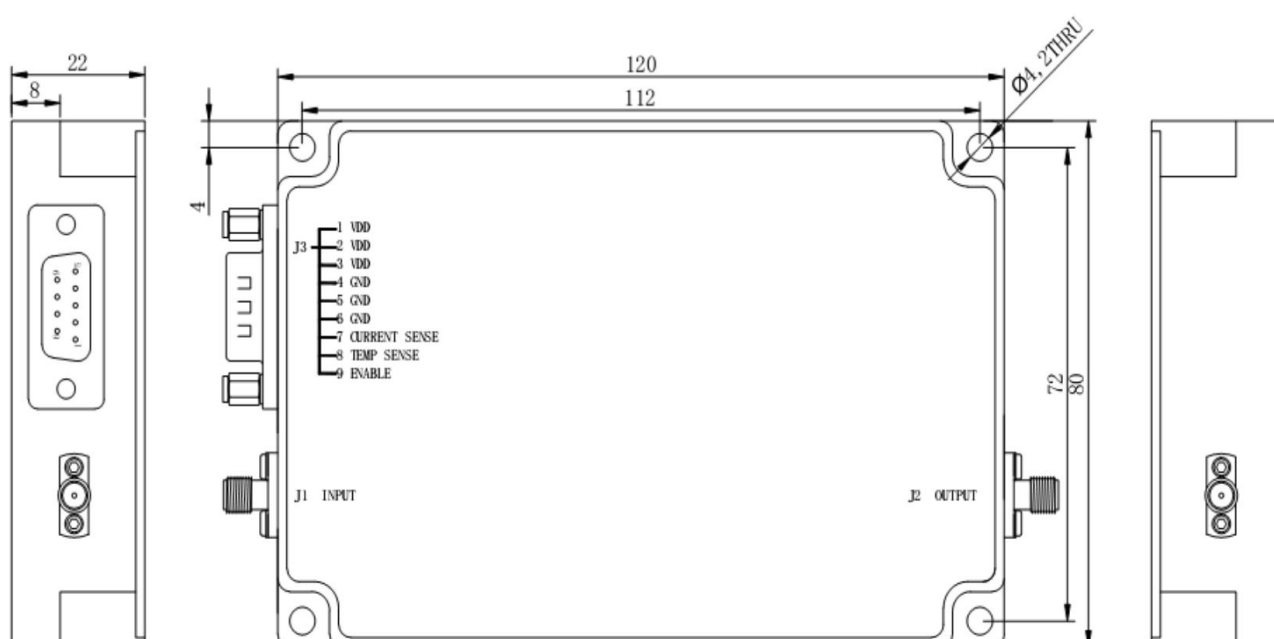




2000-18000MHz/5Watt/Module


Model Number: OC-PA2-18K5W

TYPICAL PERFORMANCE PLOTS(FOR REFERENCE)

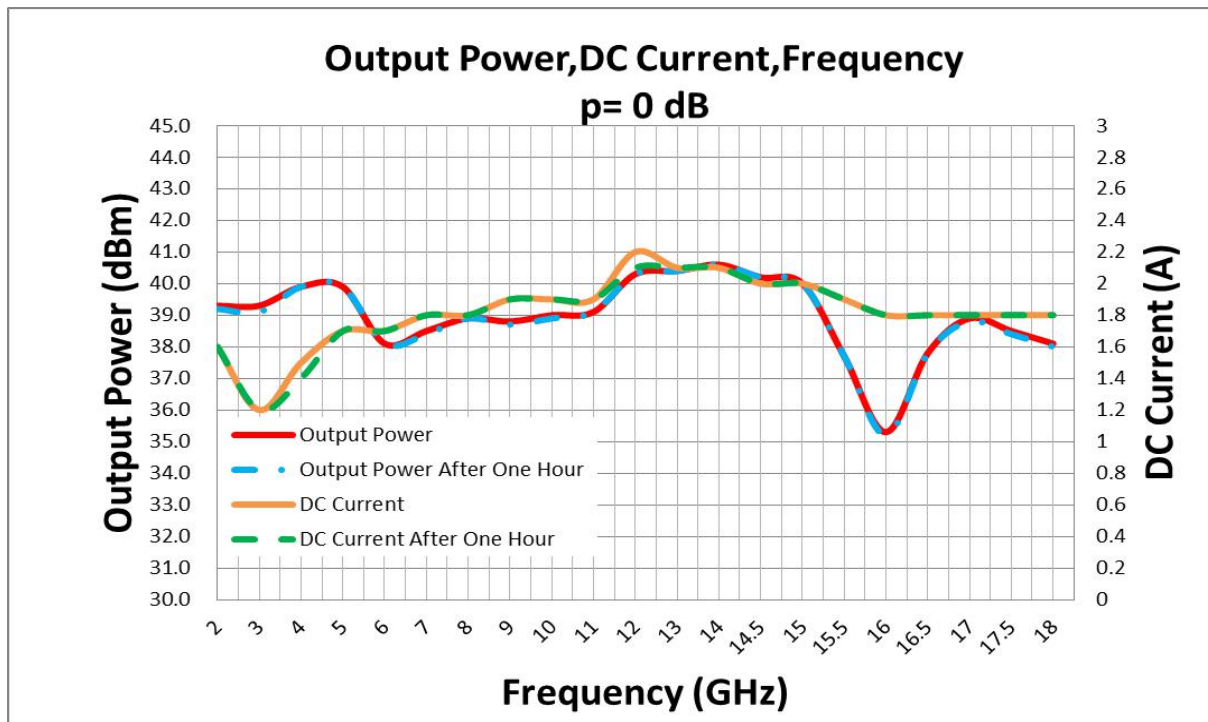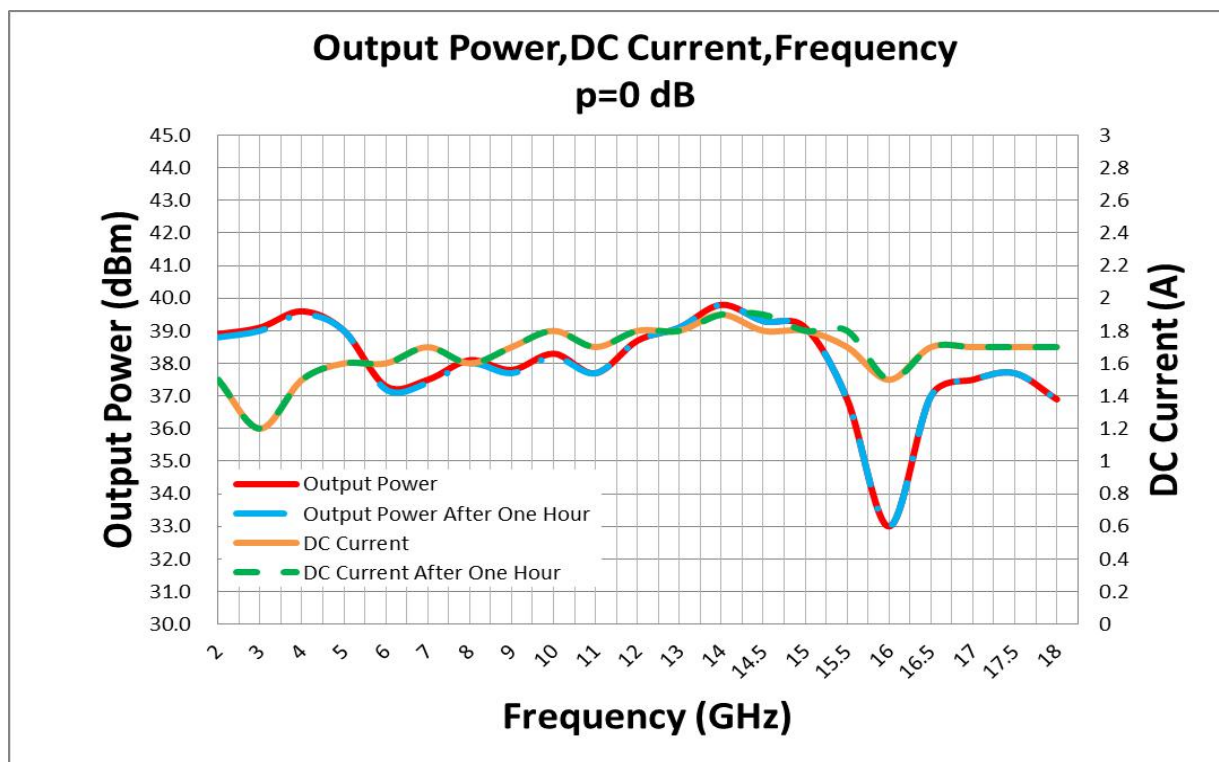
Graph1: Output Power (Low temp. $-20\pm 3^{\circ}\text{C}$)Graph2: Output Power (High temp. $+60\pm 3^{\circ}\text{C}$)

2000-18000MHz/5Watt/Module*Model Number: OC-PA2-18K5W*

Graph3: Output Power (Normal temp. +25±3℃)

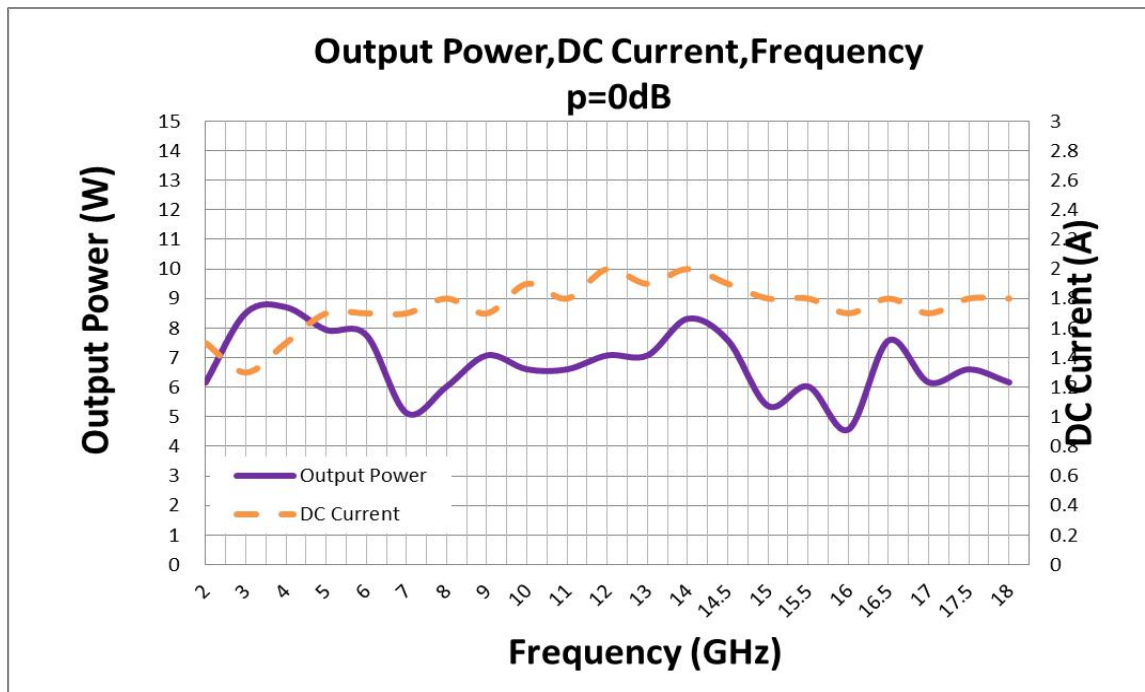

Power Gain:

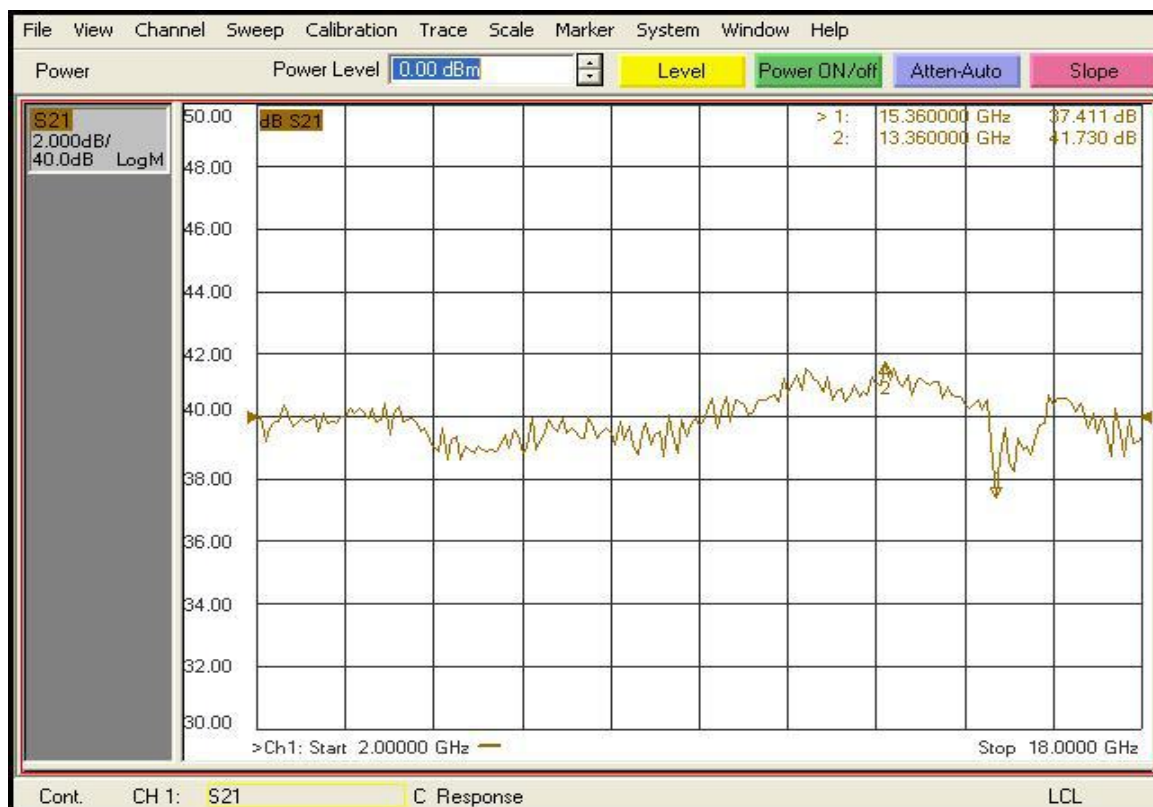

2000-18000MHz/5Watt/Module*Model Number: OC-PA2-18K5W*

Input Return Loss:

**Note:** Adequate heatsink required.