



1.8-1.9GHz/100Watt/Module

Model Number: OC-NPA1.8-1.9K100W

The model OC-NPA1.8-1.9K100W is a high power amplifier operating between 1.8GHz and 1.9GHz and offering a wide dynamic Range with 100 Watts typical saturated power. The employment of gallium nitride (LDMOS) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Narrowband & High power;
- High Efficiency;
- Small Size & Light Weight;
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	1.8		1.9	GHz
RF Output Power	Psat		100		Watt
Power Gain	Gp		50		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @80W	H		-20		dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @100W	I _{DD}		14		Amp
Switching Time @1kHz TTL	T _{on/off}			2	uSec

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	170x130x30 [6.69x5.12x1.18]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	Type-N, Female		
DC Interface Connector	Hybrid,D-sub 7 Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-40		80	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without	+5 dBm (Max)
Load VSWR @ POUT =50W	5:1 @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Thermal Overload	85°C @ heatsink [restored @ 60°C]




1.8-1.9GHz/100Watt/Module


Model Number: OC-NPA1.8-1.9K100W

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28V _{DC}
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	FORWARD MONITOR	Analog voltage relative to forward power level
5	REVERSE MONITOR	Analog voltage relative to reflected power level

OUTLINE DRAWING(All dimensions in mm [inch])

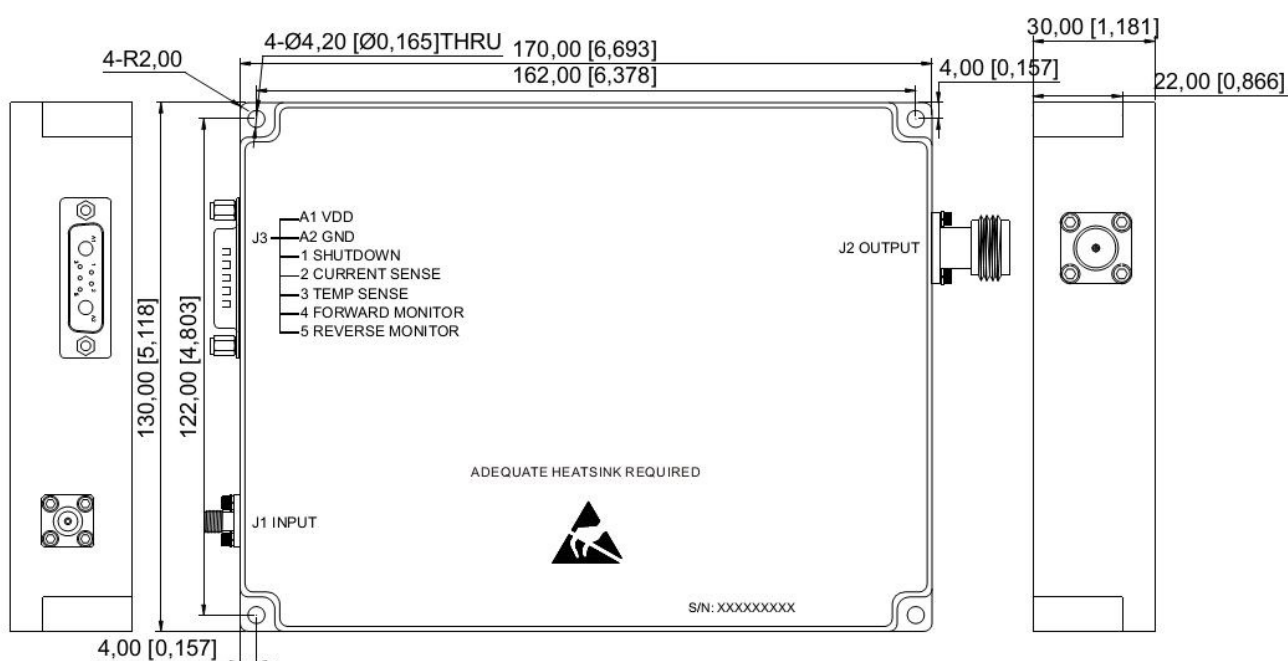

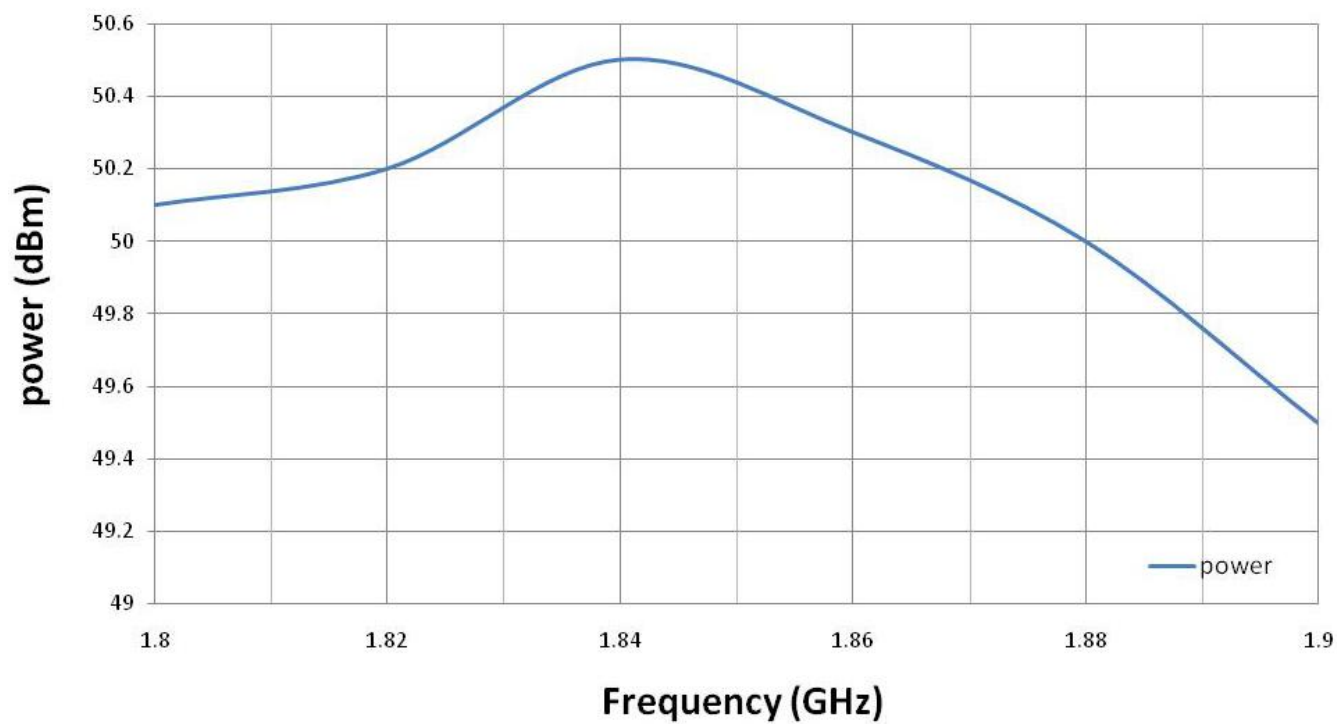**1.8-1.9GHz/100Watt/Module****Model Number: OC-NPA1.8-1.9K100W****TYPICAL PERFORMANCE PLOTS (For reference only)****Note:**

1. Adequate heatsink required.