

0.7-2.7GHz/80Watt/Module

Model Number: OC-PA07-2.7K80W

The model OC-PA07-2.7K80W is a multi-octave high power amplifier operating between 0.7 GHz and 2.7GHz and offering a wide dynamic Range with 80 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and light weight;
- Instantaneous ultra broadband;
- 50 Ohms input and Output matched;
- Built-in control and protection circuits.

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	700		2700	MHz
RF Output Power @PSAT	PSAT		80		Watt
Power Gain	Gp		49		dB
Power Gain Flatness	Δ Gp		±2.5		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @60W	H		-10		dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @70W	I _{DD}		13		Amp
Switching Time @1kHz TTL	T _{on/off}		5		uS

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	180x90x25 [7.08x3.54x0.98]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		55	°C	
Non-operating Temperature	-25		60	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ P _{OUT} =60W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]


0.7-2.7GHz/80Watt/Module

Model Number: OC-PA07-2.7K80W

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	VDD	28V _{DC}
2	VDD	28V _{DC}
3	VDD	28V _{DC}
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to Module's Current @ 100 mV/A
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

OUTLINE DRAWING (All dimensions in mm [inch])

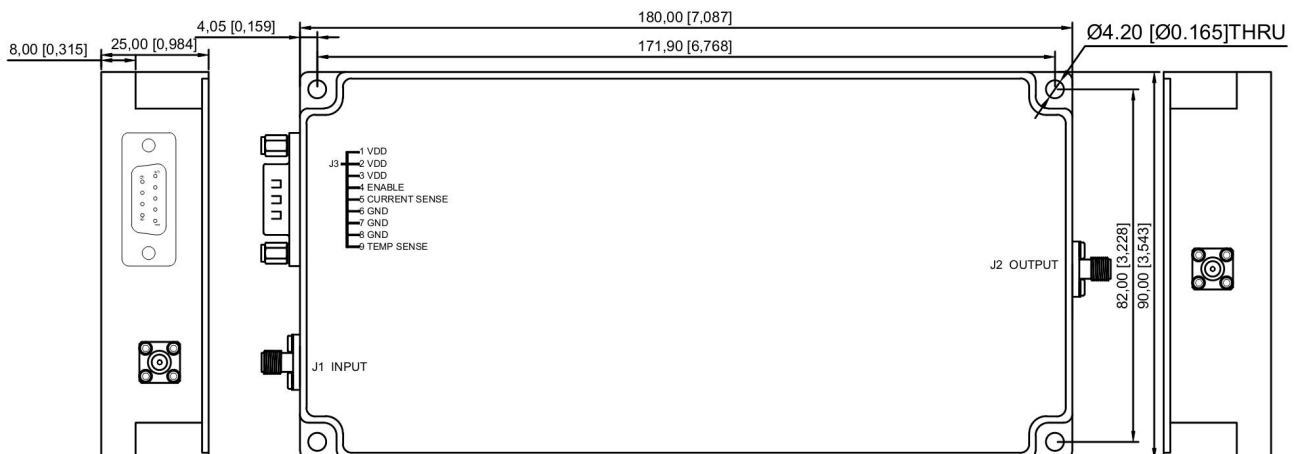

0.7-2.7GHz/80Watt/Module

Model Number: OC-PA07-2.7K80W

TYPICAL PERFORMANCE PLOTS (For reference only)

